



鎖體尺寸	長135x寬18x厚24.5(mm)
門 門 板 尺 寸	長90Lx寬18Wx厚2.5 H(mm)
鎖 芯 強 度	不銹鋼拋光處理，承受600kg壓力
信號輸出	門狀態偵察信號輸出NO/COM接點
延時功能	0 / 3秒
工作電壓	12VDC
工作電流	200mA
啓動電流	1200mA
安全類型	斷電開鎖(YB-90NA(LED));斷電上鎖(YB-90NB(LED));
LED顯示	上鎖亮燈，開鎖滅燈
門縫磁感距離	8mm
面板材料設計	鋅合金外殼(表面砂紋白烤漆)
產品重量	0.6kg

Technical drawing of the YB-90 series LED light fixture, showing front, side, and top views with dimensions in mm.


Front View (Top): Shows the overall width of 24.50±2 mm and the mounting bracket width of 24.50±2 mm.

Side View (Middle): Shows the mounting bracket height of 18.00±2 mm, the distance from the mounting hole to the center of the LED chip (33.50 mm), the LED chip diameter (φ4.50), the LED chip height (5.50 mm), the mounting bracket thickness (2.50 mm), and the total height of 24.50±2 mm. The mounting bracket has a width of 135.00±2 mm and a distance of 120.00 mm between the mounting holes.

Top View (Bottom): Shows the overall width of 90.00±2 mm, the distance from the mounting hole to the center of the LED chip (75.00 mm), the LED chip diameter (φ4.50), the LED chip height (5.70 mm), the mounting bracket thickness (2.50 mm), the mounting bracket width (28.00 mm), and the distance from the mounting hole to the center of the LED chip (28.50 mm). The mounting bracket has a width of 16.00 mm and a distance of 12.00 mm between the mounting holes. The mounting bracket has a width of 135.00±2 mm and a distance of 120.00 mm between the mounting holes.

Labels: The drawing includes labels for "出线位" (Wire Exit Position) and "磁芯" (Magnetic Core).

安裝步驟圖

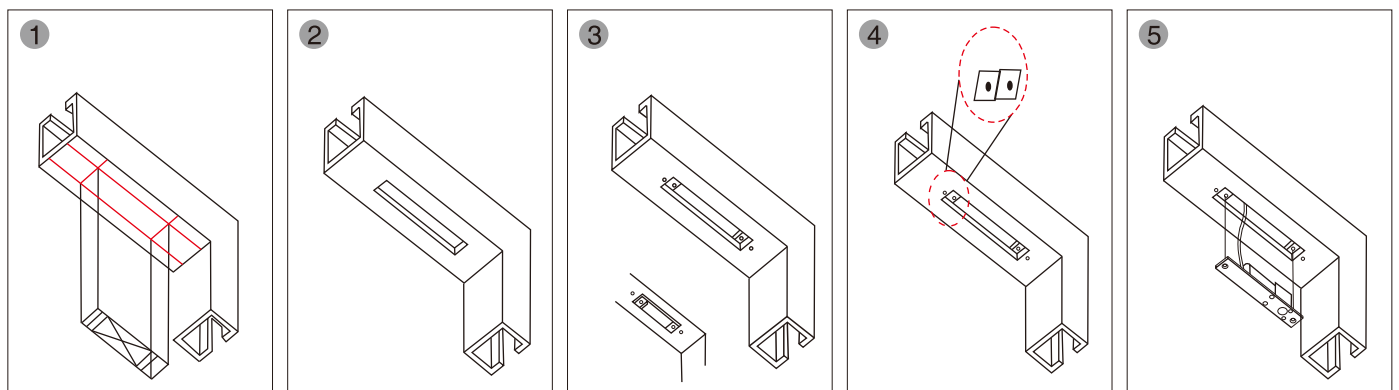

畫好綫後，將電插鎖開孔紙與中心點對齊並貼上

依照開孔紙指示，鎖體埋入位置。



切割鎖體與門門板螺絲位置

裝上固定延長墊片

安裝鎖體，接上電源；并測試。

選配輔助支架

適用於10-12mm厚度玻璃門。選用安裝于下無框玻璃門。

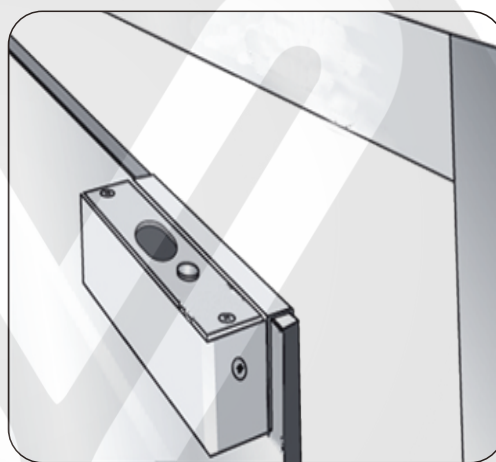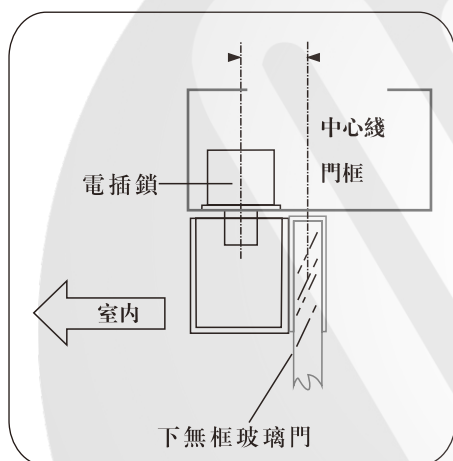

安裝接綫圖

