



YLI ELECTRONIC




Electric Bolt with Buzzer

Model: YB-700A/B(LED)-BZ

Parameters

Lock Body	255Lx34Wx38H(mm)
Magnetic Plate	100Lx25Wx3H(mm)
Bolt	16(prolongation)*16(diameter)(mm) solid 304 stainless steel
Signal Output	Lock signal: NO/NC/COM;Door signal: NO/COM
Time Delay	5/10/15/20sec.Adjustable
Buzzer	0/3/6/9 sec .Adjustable
Voltage	12-24VDC
Current	Start 1200mA,Standby 280mA
Feature	Fail Safe[YB-700A(LED)-BZ], Fail Secure[YB-700B(LED)-BZ]
LED	Light on indicates locked, light off indicates unlocked
Detection Distance	Within 8mm
Suitable for	Wooden door,meta doorl,fireproof door,glass door
Material	304 stainless steel, wire draw finishing
Weight	1.2 kg

Dimensions

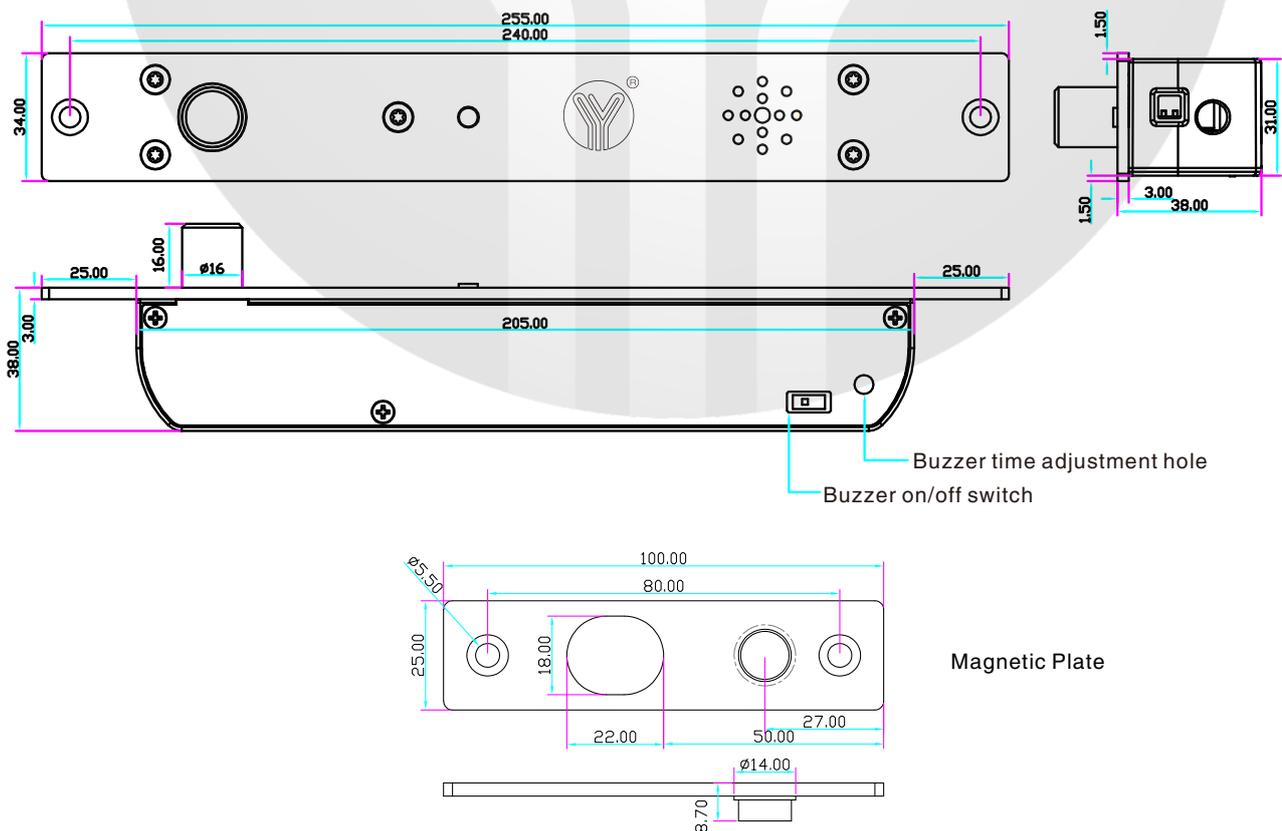

Buzzer alarm



L: buzzer off
R: buzzer on

Delay alarm potentiometer adjustment status description:


- Shortest delay time
- Longest delay time

Time Delay


Adjust the delay time for locking automatically 0/3/6/9 secs.



Wiring Diagram

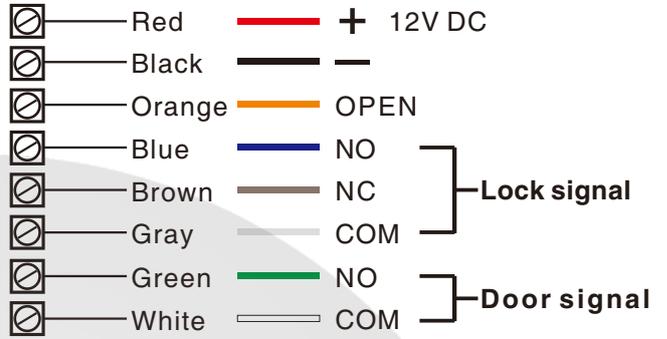

Installation Steps

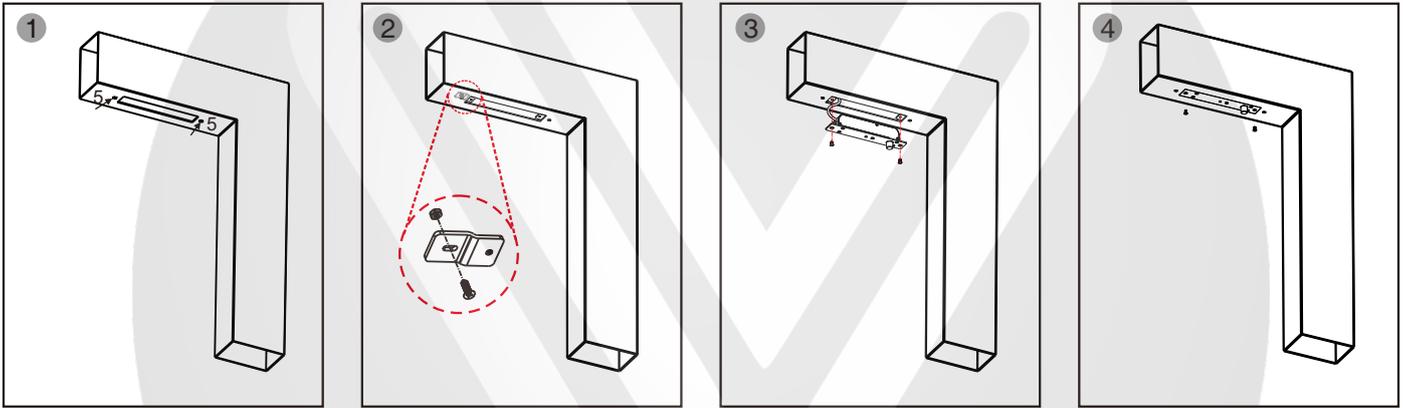

1. Incise the location of face plate and magnetic plate in the door leaf and door frame according to the mark of lore size

2. Mount extended slice

3. Connect power supply line and test

4. Tighten the screws

Installation Schematic

